



MaxPower CS6X

260/265/270/275/280/285/290/295/300P

All-purpose Module

MaxPower CS6X is a robust solar module with 72 solar cells. These modules can be used for on-grid solar applications. Our meticulous design and production techniques ensure a high-yield, long-term performance for every module produced. Our rigorous quality control and in-house testing facilities guarantee Canadian Solar's modules meet the highest quality standards possible.

Applications

- Utility
- Commercial/industrial roof-tops
- Rural area applications
- Other on-grid and off-grid applications

Quality Certificates

- IEC 61215 / IEC 61730, UL 1703, CE
- ISO9001: 2008: Standards for quality management systems
- ISO/TS16949:2009: The automotive quality management system

Environment Certificates

- ISO14001:2004: Standards for Environmental management systems
- QC080000 HSPM: The Certification for Hazardous Substances Regulations



www.canadiansolar.com

Key Features

- Industry largest silicon solar module, generating more Watt per panel and reducing BOS cost
- 6 years product warranty (materials and workmanship); 25 years module power output warranty
- Industry leading plus only power tolerance: +5W (+1.7%)
- Strong framed module, passing mechanical load test of 5400Pa to withstand heavier snow load
- The 1st manufacturer in the PV industry certified for ISO:TS16949 (The automotive quality management system) in module production since 2003
- ISO17025 qualified manufacturer owned testing lab, fully complying to IEC, TUV, UL testing standards

CS6X-260/265/270/275/280/285/290/295/300P

MaxPower

Electrical Data


	CS6X-260P	CS6X-265P	CS6X-270P	CS6X-275P	CS6X-280P	CS6X-285P	CS6X-290P	CS6X-295P	CS6X-300P
Nominal Maximum Power at STC (Pmax)	260W	265W	270W	275W	280W	285W	290W	295W	300W
Optimum Operating Voltage (Vmp)	34.9V	35.1V	35.3V	35.5V	35.6V	35.8V	35.9V	36.0V	36.1V
Optimum Operating Current (Imp)	7.45A	7.55A	7.65A	7.76A	7.86A	7.96A	8.08A	8.19A	8.30A
Open Circuit Voltage (Voc)	43.8V	43.9V	44.1V	44.1V	44.2V	44.3V	44.4V	44.5V	44.6V
Short Circuit Current (Isc)	8.04A	8.10A	8.19A	8.31A	8.42A	8.53A	8.64A	8.76A	8.87A
Operating Temperature	-40°C~+85°C								
Maximum System Voltage	1000V (IEC) /600V (UL)								
Maximum Series Fuse Rating	15A								
Power Tolerance	+5W								
Temperature Coefficient	Pmax	-0.43%/°C							
	Voc	-0.34 %/°C							
	Isc	0.065 %/°C							
	45°C								

Under Standard Test Conditions (STC) of irradiance of 1000W/m², spectrum AM 1.5 and cell temperature of 25°C

Mechanical Data


Cell Type	Poly-crystalline
Cell Arrangement	72 (6 x 12)
Dimensions	1954 x 982 x 40mm (76.93 x 38.7 x 1.57in)
Weight	27kg (59.52 lbs)
Front Cover	Tempered glass
Frame Material	Anodized aluminium alloy
Standard Packaging (Modules per Pallet)	20pcs

Engineering Drawings

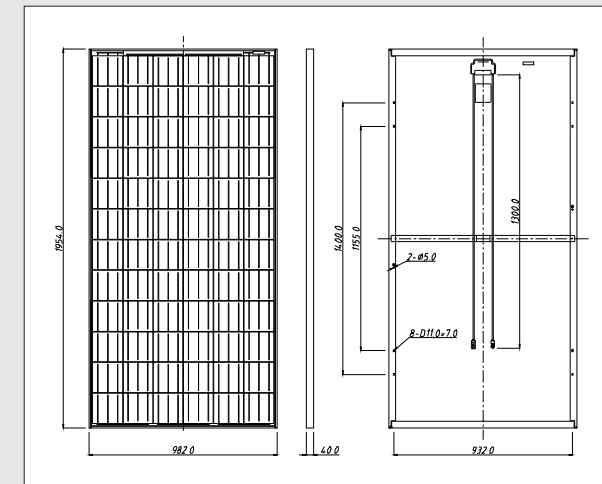

*Specifications included in this datasheet are subject to change without prior notice.

I-V Curves (CS6X-280P)

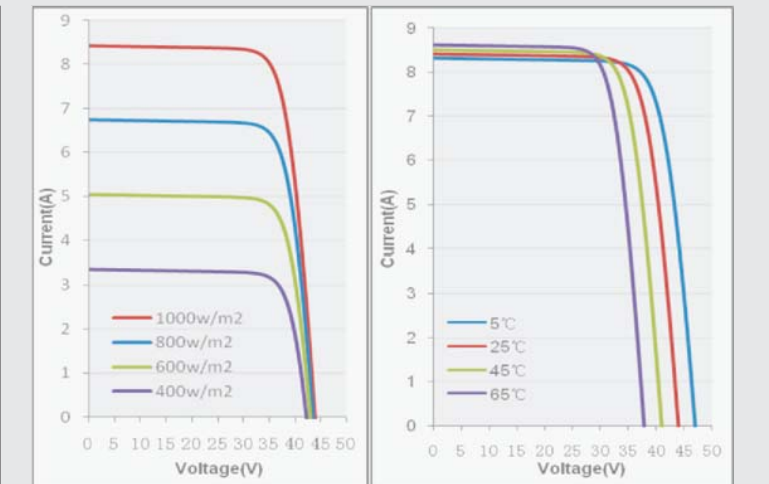

About Canadian Solar

Canadian Solar Inc. is one of the world's largest solar companies. As a leading vertically-integrated manufacturer of ingots, wafers, cells, solar modules and solar systems. Canadian Solar delivers solar power products of uncompromising quality to worldwide customers. Canadian Solar's world class team of professionals works closely with our customers to provide them with solutions for all their solar needs.

Canadian Solar was founded in Canada in 2001 and was successfully listed on NASDAQ Exchange (symbol: CSIQ) in November 2006. Canadian Solar is on track to expand cell capacity to 700MW and module capacity to 1.3GW in 2010.

Headquarters | 650 Riverbend Drive, Suite B
 Kitchener, Ontario | Canada N2K 3S2
 Tel: +1-519-954-2057
 Fax: +1-519-578-2097
 inquire.ca@canadiansolar.com
 www.canadiansolar.com